



Nipper Clipper

The RRP Nipper Clipper Safelok® I & III Applicator / Remover is a dual workhead production / maintenance machine with the capability of applying and retracting Safelok I and Safelok III clips without tooling change out. The third Nipper Workhead lifts the ties to fully apply clips in a loose tie scenario.



Key Features:

- Third 'Nipper' workhead picks up concrete rail
- Unique retraction tool releases the clip from the socket, retracts the clip, and precisely positions the clip at the end of the socket in preparation for re-installation
- Exclusive feature prevents clips from being lost and reduces the risk of injury from flying clips
- Simple adjustments align the workhead to accommodate rail heights and clip extraction distance
- Two joystick controls to control each side of the workhead independently

Specs:

- Seating Capacity: 3 (one operator, two passengers)
- Travel Speed: 24 mph (~39 km/h); chain-driven propulsion system
- Fuel Tank Fill Capacity: 49 gallons (~185.5 liters) with 2" diameter fill neck, bottom sump, and mechanical fluid level gauge
- Hydraulic Reservoir Fill Capacity: 51 gallons (~193 litres) with clean-out covers, guarded fluid level, and temperature gauge

Safety:

- Features a special workhead that prevents clips from being lost and reduces the risk of injury from flying clips
- Enclosed cab with HVAC system, in-cab pressurizer for a safer work environment, and acoustical protection
- Dual side egress optimizes safe operator exit in congested areas
- Safety is enhanced using electric-powered controls that reduce operator fatigue
- Workhead barriers cover exposed areas

Technology:

- Easy touchscreen controls with workhead adjustments from the operator seat, saving time and offering a safer way to make machine adjustments
- Onboard electrical system diagnostics to simplify troubleshooting and lessen downtime
- Remote program updates and remote troubleshooting with built-in telematics (within cell range)
- Smart hydraulic valves with self-diagnostics and maintenance screens increase flexibility, reliability, and reduce parts inventory by using the same control valve for every function



1955 Norwood Court, Mt. Pleasant, WI 53403


262.637.9681 | custserv@racinerailroad.com

www.racinerailroad.com

Always wear proper PPE when operating




Nipper Clipper

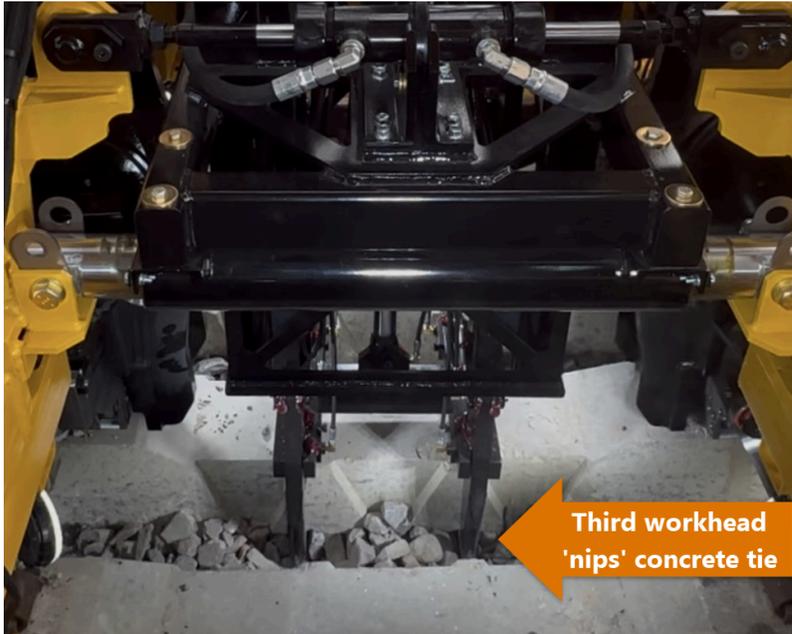

Third workhead 'nips' concrete tie

'Nipper' clips the concrete tie while the workheads insert clips

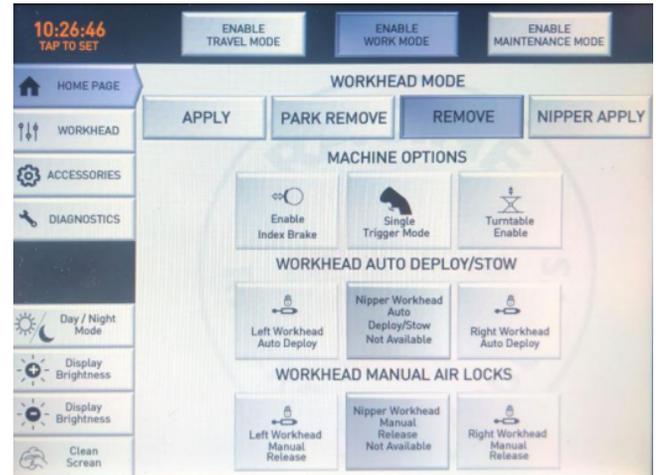

Operator touchscreen control panel for machine operation and maintenance

Dimensions:

Length: 28' 6" (~8.7 m)

Width: 8' 6" (~2.6 m)

Height: 10' 5" (~3.18 m)

Weight: 23,600 lbs (~10,705 kg)

*Dimensions vary based on user options



1955 Norwood Court, Mt. Pleasant, WI 53403

262.637.9681 | custserv@racinerailroad.com

www.racinerailroad.com

Always wear proper PPE when operating