



Dual Anchor Adjuster

INNOVATIVE DESIGNS FROM RACINE RAILROAD PRODUCTS



RRP Design

Save time and anchor replacement cost by squeezing instead of hammering anchors in place.

The Dual Anchor Adjuster can squeeze all types of rail anchors used in a wood tie replacement crew. The DAA can re-tighten rail anchors in a surfacing operation, or during rail replacement in a quality control application.

Rail anchors do not have to be removed and reapplied during wood tie replacement operations, allowing for increased productivity and longer rail anchor life.

Innovative Technology

- Programmable MD4 controlled automation has faster & smoother cycle times than previous RRP machines.
- Onboard electrical system diagnostics that simplify troubleshooting and lessen downtime.
- Remote program updates and remote troubleshooting with built-in telematics available.

Easy Set-up and Operation

- Easy touchscreen controls for workhead adjustments are made inside the cab from the operator seat, saving time while keeping the operator in a safe environment.
- Auto and Manual operation modes.
- Reliable workhead design provides years of trouble-free service.

Versatile

- In-cab adjustments align the workhead to accommodate rail height.
- Easy access to optional tools ensures a quick changeout for either 5", 5 1/2", or 6" rails on all anchor types throughout the head's 15" range.
- Squeeze two anchors on one rail or four anchors on two rails.
- Uniformly positioning anchors against tie or tie plates without twisting.
- Many components are interchangeable with the Dual Anchor Spreader [DAS].

Video of the Dual Anchor Adjuster: <https://tinyurl.com/mpn9sn3r>



Dual Anchor Adjuster

INNOVATIVE DESIGNS FROM RACINE RAILROAD PRODUCTS




Specifications

- Dimensions: 22'7" L x 8'5" W x 10'2" H
- Weight: 19,00 lbs
- Travel Speed: 25 MPH
- Engine: We offer a variety of engine packages to choose from, No DEF
- Fuel Capacity: 50 Gallons
- Hydraulic Reservoir: 58 Gallons (Case Drain Filter, Pressure Filter, & Return Filter options available)
- 24 volt system with circuit breakers for lights & accessories
- Seating Capacity: 1 operator & 2 passengers

Features

- Excellent visibility of the work zone, increasing productivity and reducing wear on machine travel components.
- Machine has un-obstructed operator visibility fore and aft when track traveling.
- Cab: Enclosed Heat & A/C, full ergonomic seat with joystick controls, tinted safety glass for operator comfort.
- Various HVAC options to choose from.
- Multiple storage options for tools & equipment
- Two joystick controls to control each side of the workhead independently.
- Center H-Frame turntable that sets on the rails to manually rotate the machine as needed.
- Easy accessibility to workhead components to perform routine maintenance.

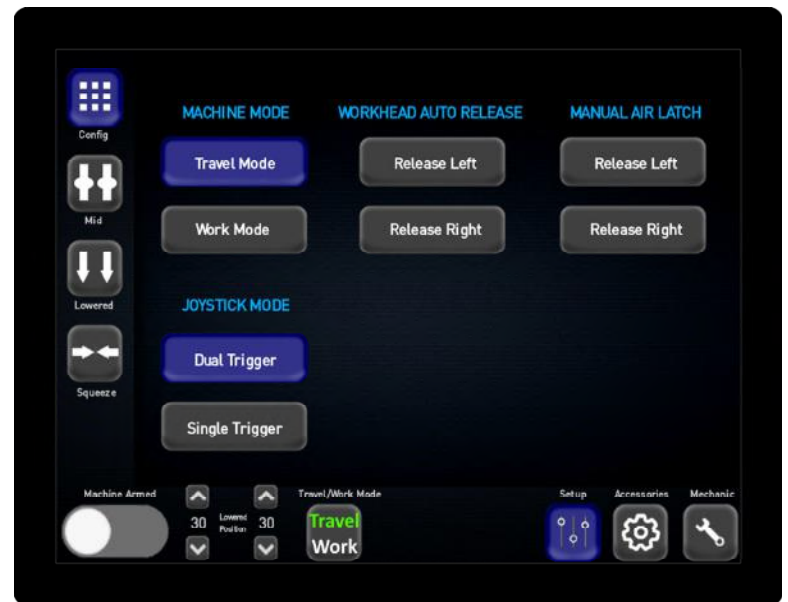

Operator Touchscreen Control Panel for Workhead Adjustment and Diagnostic Troubleshooting

For a complete list of specifications and machine options available, contact Racine Railroad Products, Inc. at:
Tel (262) 637-9681 / email: custserv@racinerailroad.com
1955 Norwood Court Mount Pleasant, Wisconsin 53403

